



- 5. Use the button on the front of the lock case to latch back the lock in the open position. Align the arrow on the back of the case with the arrow on the rotatable slot. Place the lock case over the mounting plate, making sure that the flat connecting bar is inside the slot on the lock case.
- 6. Push the lock case down firmly onto the mounting plate. Then slide the lock case sideward to its final position, flush with the edge of the door. Secure the lock case to the mounting plate with the two small screws supplied.
- 7. Close the door and, using the lock case as a guide, mark the position of the remaining component the 'staple' on the door frame. Chisel out a recess in the door frame to hold the staple flush with the frame and fix it with the screws provided.

The fitting of your new Yale lock is now complete and guaranteed for 10 years.

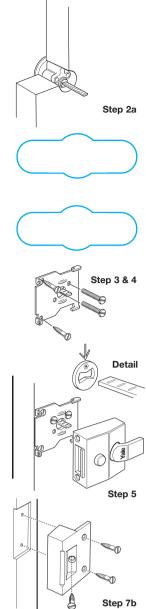



60mm

Step 1

